

# JEFF POWER COMPANY LIMITED



Rm B, 14/F., Tak Lee Commercial Building, 113-117 Wanchai Road, Hong Kong  
 Tel: (852) 2832 9128 Fax: (852) 2838 2308  
 E-mail: sales@jeffpower.com Webpage: http://www.jeffpower.com


## Sealed Rechargeable Nickel Metal Hydride Battery Data Sheet

### Model No.: JPH3A750

Type	AAA				
Normal Voltage	Standard	1.2V			
Weight	14g				
Capacity		Charge	Discharge	Normal	Typical
	Low Rate - 0.1C	0.1C	0.2C	750 mAh	760 mAh
	High Rate - 1C	1.0C	1C	675 mAh	683 mAh
Charging		Standard	Quick	Fast	
	Charge Current	75 mA (0.1C)	325 mA (0.5C)	750 mA (1.0C)	
	Time Required (hrs)	15 hrs	144 min	69min or $-\Delta V(5mV)$	
	Minimum Overcharge	75 mA (0.1C * 24d)			
	Maximum Overcharge	150 mA (0.2C * 1d) with cut-off control			
Maximum Discharge Current	Continuous	0.75 A			
	Momentary (1 second)	1.5 A			
Internal Impedance	Typical at 1000Hz	23 milliohms at 50% Discharge			
Temperature		Storage for < 1 Month(°C)		Storage for < 1 Year (°C)	
	Minimum	-20		-20	
	Maximum	50		40	
		Discharge(°C)		Charge(°C)	
	Minimum	-20		-20	
	Maximum	45		45	
Service Life	Standard (IEC61436)	500 cycles (for reference)			
Designations	IEC - 61436 / FIDS				

Remark: Data in this specification are subjected to change without notice.

Actual product will be adjusted according to customer specification at order.

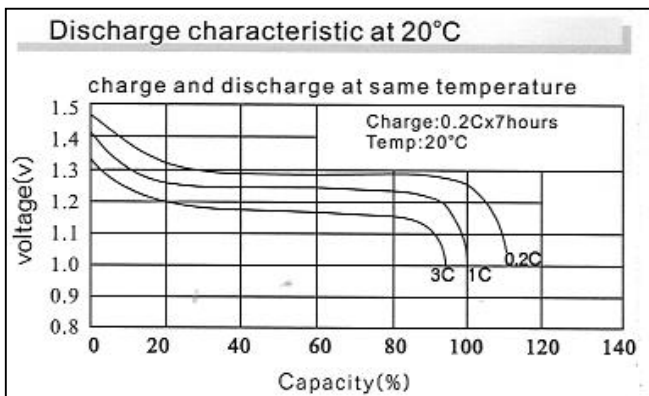

Dimensions (mm)	
D	10.2±0.5
C	3.8±0.5
H	43.8±0.5
H1	0.5(REF)

