

JEFF POWER COMPANY LIMITED



Rm B, 14/F., Tak Lee Commercial Building, 113-117 Wanchai Road, Hong Kong
 Tel: (852) 2832 9128 Fax: (852) 2838 2308
 E-mail: sales@jeffpower.com Webpage: http://www.jeffpower.com


Sealed Rechargeable Nickel Metal Hydride Battery Data Sheet

Model No.: JPH5A200

Type	AAAAA					
Normal Voltage	Standard	1.2V				
Weight	5g					
Capacity		Charge	Discharge	Normal	Typical	
	Low Rate - 0.1C	0.1C	0.2C	200 mAh	210 mAh	
	High Rate - 1C	1.0C	1C	180 mAh	189 mAh	
Charging		Standard	Quick	Fast		
	Charge Current	20 mA (0.1C)	100 mA (0.5C)	200 mA (1.0C)		
	Time Required (hrs)	16 hrs	144 min	69min or $-\Delta V(5mV)$		
	Minimum Overcharge	20 mA (0.1C * 24d)				
	Maximum Overcharge	40 mA (0.2C * 1d) with cut-off control				
Maximum Discharge Current	Continuous	0.2 A				
	Momentary (1 second)	0.4 A				
Internal Impedance	Typical at 1000Hz	120 milliohms at 50% Discharge				
Temperature		Storage for < 1 Month(°C)		Storage for < 1 Year (°C)		
	Minimum	-20		-20		
	Maximum	50		40		
		Discharge(°C)		Charge(°C)		
	Minimum	-20		-20		
	Maximum	45		45		
Service Life	Standard (IEC61436)	500 cycles (for reference)				
Designations	IEC - 61436 / FIDS					

Remark: Data in this specification are subjected to change without notice.

Actual product will be adjusted according to customer specification at order.

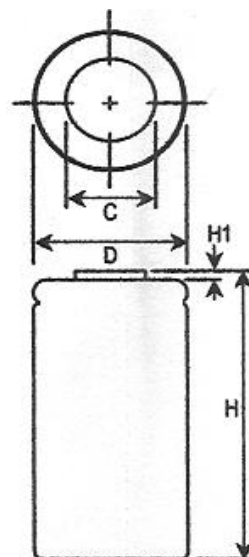

Dimensions (mm)	
D	6.8 ±0.2
C	3.0 ±0.3
H	41 ±0.5
H1	1.2 (REF)

