

# JEFF POWER COMPANY LIMITED



Rm B, 14/F., Tak Lee Commercial Building, 113-117 Wanchai Road, Hong Kong  
 Tel: (852) 2832 9128 Fax: (852) 2838 2308  
 E-mail: sales@jeffpower.com Webpage: http://www.jeffpower.com


## Sealed Rechargeable Nickel Cadmium Battery Data Sheet

### Model No.: JPKSC2000

Type	SC					
Normal Voltage	Standard	1.2V				
Weight	48g					
Capacity		Charge	Discharge	Normal	Typical	
	Low Rate - 0.1C	0.1C	0.2C	2000 mAh	2100 mAh	
	High Rate - 1C	1.0C	1C	1800 mAh	1890 mAh	
Charging		Standard	Quick	Fast		
	Charge Current	200 mA(0.1C)	1000 mA (0.5C)	2000 mA (1.0C)		
	Time Required (hrs)	15 hrs	60 min	69min or $-\Delta V(5mV)$		
	Minimum Overcharge	200 mA (0.1C * 24d)				
	Maximum Overcharge	400 mA (0.2C * 1d) with cut-off control				
Maximum Discharge Current	Continuous	4.0 A				
	Momentary (1 second)	10.0 A				
Internal Impedance	Typical at 1000Hz	20 milliohms at 50% Discharge				
Temperature		Storage for < 1 Month(°C)		Storage for < 1 Year (°C)		
	Minimum	-20		-20		
	Maximum	50		40		
		Discharge(°C)		Charge(°C)		
	Minimum	-20		-20		
	Maximum	45		45		
Service Life	Standard (IEC61436)	500 cycles (for reference)				
Designations	IEC - 61436 / FIDS					

Remark: Data in this specification are subjected to change without notice.

Actual product will be adjusted according to customer specification at order.

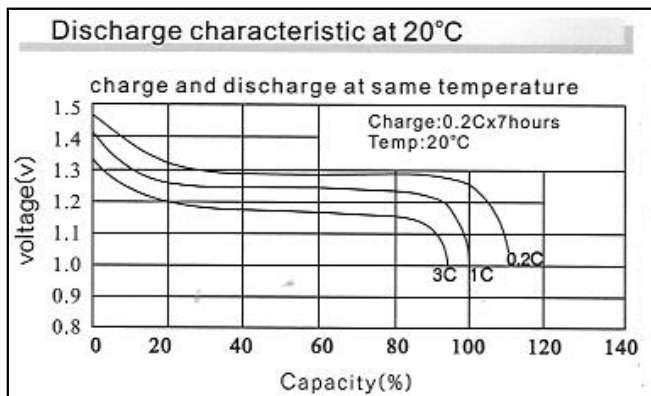

Dimensions (mm)	
D	22.5±0.5
C	8.0±0.3
H	42.5±0.5
H1	0.5(REF)

