



LITHIUM POLYMER

RECHARGEABLE BATTERY

APPROVAL SHEET

TO: _____

Attn: _____

Model: JPP733496P20 **Release:** 04

Prepared by: David Tse **Date:** 19 - 2 - 2008

Approved by Ambrose Li **Date:** 19- 2 -2008

Approved by: _____ **Date:** _____



Technical Specification

Description: Lithium Polymer Single Battery 2100mAh designed for 20C Rate

1 Scope

This specification is applied to Lithium Ion Battery supplied by Jeff Power Co. Ltd.

2 Product and Model

2.1 Product: Polymer Lithium Ion Battery Single Cell

2.2 Model : JPP733496P20


3 Ratings

Item		Rating	Remark
3.1 Capacity	Typical	2100mAh	Discharge: 0.2CmA(420mA)
	Minimum	2100mAh	
3.2 Nominal Voltage		3.7V	
3.3 AC Impedance (IR)		3.7V	
3.4 Discharge Cut-off Voltage		2.75V	
3.5 Charge Current		1050mA	Standard Charge
3.6 Charge Voltage		4.2V	
3.7 Max. Charge Voltage		4.25V	
3.8 Charge Time		Approx. 2.5hr	Charge at 1050mA
3.9 Max. Charge Current		2100mA	1CmA
3.10 Max. Discharge current		42000mA	20CmA
3.11 Weight		Approx. 51g	
3.12 Operation Temperature	Charge	0 ~ +20°C	
	Discharge	-20 ~ +60°C	
3.13 Storage Temperature	< 1 month	-20 ~ +45°C	Recommended to store at room temperature: 23°C
	> 6 months	-20 ~ +35°C	

4 Dimensions and Appearances

4.1 Dimension

Items	Specifications
Thick T (max.)	3mm
Width W (max.)	50.5mm
Length L (max.)	58.5mm
L1	1±0.5mm
L2	9±1mm
L3	3.25±0.25mm
W'	
D	
α1	
α1	

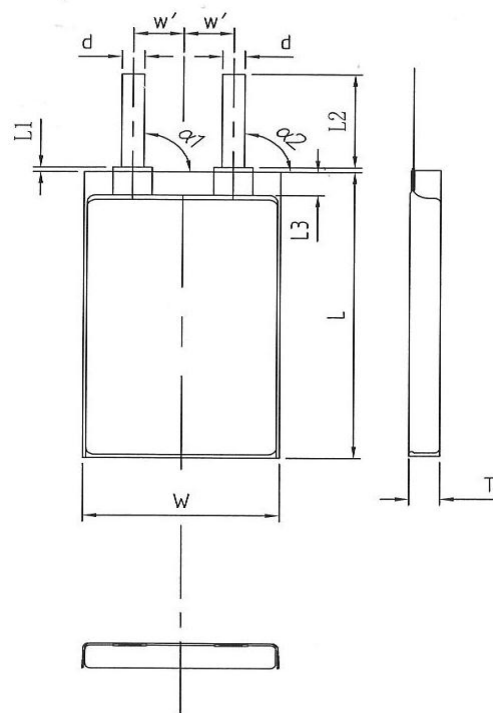



Description: Lithium Polymer Single Battery 2100mAh designed for 20C Rate

5 Performance

5.1 Standard Test Conditions

Test should be conducted with new batteries within one month after shipment from our factory and the cells shall not be cycled more than five times before the test. Unless otherwise defined, test and measurement shall be done under temperature of 23±2°C and relative humidity of 45~85%. The test results are not affected evidently by such conditions of temperature 15~30°C or humidity 25~85%RH.

5.2 Measuring Instrument or Apparatus

5.2.1 Dimension Measuring Instrument

The dimension measurement shall be implemented by instruments with equal or higher precision scale of 0.01mm.

5.2.2 Voltmeter

Standard class specified in the national standard or more sensitive class having inner impedance more than 10 MΩ.

5.2.3 Ammeter

Standard class specified in the national standard or more sensitive class. Total external resistance including ammeter and wire is less than 0.01 Ω.

5.2.4 Impedance Meter

Impedance shall be measured by a sinusoidal alternating current method (1kHz LCR meter).

5.3 Standard Charge

Test procedure and its criteria are referred as follows:

0.5CmA=1050mA

Full charge condition: 1) Constant current 0.5CmA(1050mA), 2) Constant voltage 4.2V cutoff at 60mA for total of not more than 3.5hours in 23±2°C environment.

5.4 Rest Period

Unless otherwise defined, 30min,rest period after charge,30min,rest period after discharge.

5.5 Initial Performance Test

Item	Measuring Procedure	Requirements
(1) Open-Circuit Voltage	The open-circuit voltage shall be measured within 24 hours after standard charge.	≥4.13V
(2) AC Impedance Resistance	The Impedance shall be measured in an alternating current method (1kHz LCR meter) after standard charge at 23 ± 2 °C.	≤8mΩ
(3) Minimum Capacity	The capacity on 0.2CmA(420mA)discharge shall be measured after standard charge at 23±2 °C (specified CS).	CS≥2100mAh



Description: Lithium Polymer Single Battery 2100mAh designed for 20C Rate

5.6 Electrical Performance

5.6.1 Temperature Dependence of Capacity (Discharge)

Cells shall meet the discharge capacity requirements listed in the below table under respective discharge temperatures. The capacities are to be measured with constant discharge current 0.2CmA (420mA, 2.75V cut-off) after standard charge at 23 ± 2°C.

Discharge Temperature	-20°C	23°C	60°C
Discharge Capacity	50%	100%	95%

5.6.2 Cycle Life

30min rest period after standard charge, 0.5CmA discharge to a cut-off voltage of 2.75V, 30min rest period, the capacity shall be measured after 300 cycles of standard charge and 0.2CmA discharge to a cut-off voltage of 2.75V at 23±2°C.

Capacity ≥1400mAh

5.6.3 Shelf Life

Item	Measuring Procedure	Requirements
Storage Characteristics 1	1 The capacity on 1.0CmA discharge shall be measured after standard charge and then storage at 23 ± 2°C for 30 days.	Remaining Capacity ≥ 85% CS
	2 After above step, the remaining capacity measured by standard charge and discharge.	Recovery capacity ≥ 90% CS
Storage Characteristics 2	1 The capacity on 1.0CmA discharge shall be measured after standard charge and then store at 60 ± 2°C for 7 days.	Remaining Capacity ≥ 60% CS
	2 After above step, the remaining capacity measured by standard charge and discharge.	Recovery capacity ≥ 80% CS

5.6.4 Long Time Storage Characteristics

After about half charge after a period of storage at 23 ± 2°C for one year(365 days). The remaining available capacity is ≥ 85% CS. The capacity is determined by three standard charge and discharge cycles, taking the highest capacity record into account.



Description: Lithium Polymer Single Battery 2100mAh designed for 20C Rate

5.7 Mechanical Performance

Items	Measuring Procedure	Requirements
Vibration test	After standard charge, the battery is to be tested as following conditions: Amplitude:0.8mm Frequency:10~55Hz(sweep:1Hz/min) Direction: X/Y/Z axis for 90~100min. The battery is to be tested in three mutually perpendicular to each axis.	No fire, no explosion, no smoking is observed.
Drop Test	Drop the battery in the shipment condition(full-charge)from 1m height onto 5cm or thicker concrete with p-tile on it 3 times each of X, Y, and Z directions at 23 ± 2 °C	No fire, no explosion, no smoking is observed.

6 Handling Instructions

Read and observe the following warnings and precautions to ensure correct and safe use of Li-ion batteries.

Danger!

Failure to observe the following precautions may result in battery leakage, overheating, explosion and/or fire

- Do not immerse the battery in water or allow it to get wet.
- Do not use or store the battery near sources of heat such as a fire or heater.
- Do not use any chargers other than those recommended.
- Do not reverse the positive(+) and negative(-) terminals.
- Do not connect the battery directly to wall outlets or car cigarette-lighter sockets.
- Do not put the battery into a fire or apply direct heat to it.
- Do not short-circuit the battery by connecting wires or other metal objects to the positive(+) and negative(-) terminals.
- Do not carry or put the battery together with necklaces, hairpins or other metal objects.
- Do not strike, throw or subject the battery to sever physical shock
- Do not pierce the battery casing with a nail or other sharp object, break it open with a hammer, or step on it.
- Do not directly solder the battery terminals.
- Do not attempt to disassemble or modify the battery in any way.
- Do not recharge the battery near a fire or in extremely hot conditions.



Description: Lithium Polymer Single Battery 2100mAh designed for 20C Rate

Warning!

Failure to observe the following precautions may result in battery leakage, overheating, explosion and/ or fire.

- Do not place the battery in a microwave oven or pressurized container.
- Do not use the battery in combination with primary batteries(such as dry-cell batteries) or batteries of different capacity, type or brand.
- Do not use the battery if it gives off an odor, generates heat, becomes discolored or deformed, or appears abnormal in any way. If the battery is in use or being recharged, remove it from the device or charger immediately and discontinue use.
- Keep the batteries out of the reach of children. If a child somehow swallows a battery, seek medical attention immediately.
- If the battery leaks or emits an odor, immediately remove it from the proximity of any exposed flame.
- The leaking electrolyte can ignite and cause a fire or explosion. If the battery leaks and electrolyte gets in your eyes, do not rub them. Instead, rinse them with clean running water and immediately seek medical attention. If left as is, electrolyte can cause eye injury.

Caution!

- Do not use or store the battery where is exposed to extremely hot, such as under window of a car in direct sunlight in a hot day. Otherwise, the battery may be overheated. This can also reduce battery performance and/or shorten service life.
- Use the battery only under the following environmental conditions. Failure to do so can result in reduced performance or a shorten service life. Recharging the battery outside of these temperatures can cause the battery to overheat, explode or catch fire.

Operating environment:

When charging the battery: 0°C ~45°C

When discharging the battery: -20°C ~60°C

When stored up to 30 days: -20°C ~45°C

When stored up to 90 days: -20°C ~35°C

- In cases where children use the battery, instruct them on the contents of the user' s guide and keep an eye on them to ensure that the battery is being used correctly. If the battery leaks and electrolyte gets your skin or clothing, immediately rinse the affected area with clean running water. If left as is, skin inflammation can occur.
- For directions on battery installation and removal, read the instruction manual that accompanies the equipment in which the battery will be used.
- If a device is not used for an extended period, the battery should be removed and stored in a cool, dry place. Otherwise, resting or reduced performance may occur.
- If the terminals of the battery are dirty, wipe them clean with dry cloth before use. Otherwise, solid electrical contact may not be charged with the equipment, and this can cause power outages or charging to fail.

7 Period of Warranty

The period of warranty is one year from the date of shipment. Guarantees to give a replacement in case of cells with defects proven due to manufacturing process instead of the customer's abuse and misuse.



Jeff Power Co. Ltd.

Technical Specification

Model:JPP733496P20

Description: Lithium Polymer Single Battery 2100mAh designed for 20C Rate

8 **Shipment**

Partial charged condition.

9 **Amendment of this Specification**

This specification is subject to change with prior notice
